


Venga







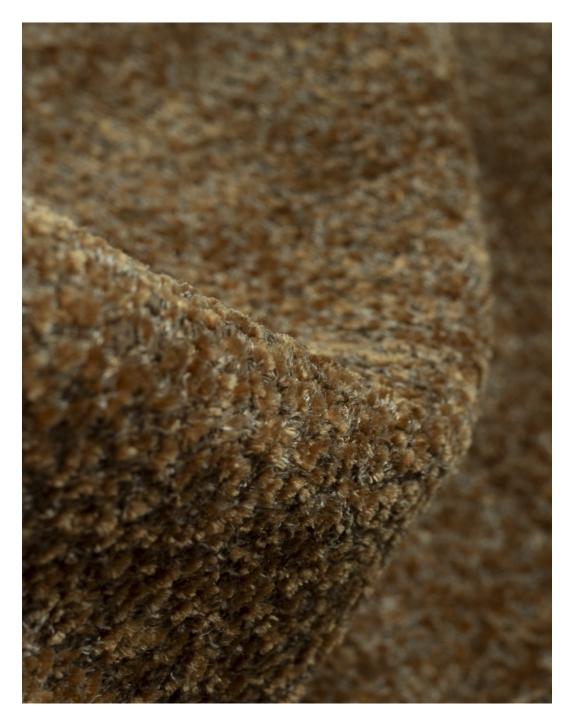









Venga

This soft quality is a proud member of our Comfort collection. A collection that consists only of soft, voluminous and elegant upholstery fabrics.

Venga is 100% softness made of virgin polyester and this voluminous textile will fulfill your wishes for comfort and coziness. The multicoloured and subtle high-low structure gives an amazing appearance to the sofa, chair and bed.

Easy to upholster and no need to worry about loops, this flatwoven chunky fabric is made of full chenille yarn. Due to chenille yarns, sitting mirror and shading may appear during usage, this can be minimized by brushing the fabric on a regular base. These properties belong to pile fabrics such as Venga.

The complete colour range has been developed by looking at the latest trend. Even in light colours it is easy to clean and maintain, Venga is also machine-washable at 30 degrees Celsius*.

Try Venga and you will be impressed by the look, incredible touch and elegance.

- Always be careful with sharp or rough objects such as watches, buckles, or velcro as they may damage the fabric.
- We recommend to wash the cover inside out and immediately place the cover back to the piece of furniture, slightly damp, after washing.

Textaafoam originals Established in 1970, this Dutch family business brings together craftsmen in textiles and furniture design to build an unrivalled portfolio in upholstery fabrics that meets buyer's needs every time. Featuring a wide colour range, ultimate value for money and excellent reliability in the supply chain.

Composition


/ faceside 100%PES / backside 100%PES / chenille jacquard





Please note: colours may vary according to your screen settings.








liver 10

plumb 168

taupe 12





wood 108

zinc 167

Venga - Article passport A multicoloured and subtle high-low structured article. Available from stock in a wide range of contemporary and commercial colours. **Product characteristics** chenille jacquard sofa's, beds, chairs with fitted and loose fitting upholstery Applications Composition faceside 100%PES Composition backside 100%PES Bonding Statistic code 54075200 Dyeing method piece dyed Available colours 17 Packaging bubble wrap

Test	Test specification	Executed by laboratory:	Unit	Testresult		Norm RAL GZ 430/4:2019-01		Norm DIN EN 14 465:2006-09	
				Dry	Wet	DGM	DGM+		
Abrasion resistance - yarn breakage	DIN EN ISO 12947-1:2007-04, DIN EN ISO 12947-2:2017-03	CTL	cycles	>100.000		min. 12.000	min. 16.000	А	
Pilling	DIN EN ISO 12945-2:2000-11. 2000 cycles	CTL	grade	4		min. 3-4	min. 4	В	
Colour fastness to light	DIN EN ISO 105-B02:2014-11. Process 3, exposure level 5								
	light colours	CTL	grade	5		min. 4	min.5	В	
	middle colours	CTL	grade	5		min. 4	min.5	В	
	dark colours	CTL	grade	5		min. 4	min.5	В	
Colour fastness to rubbing	DIN EN ISO 105-X12:2016-11								
	light colours	CTL	grade	5	5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A	
	middle colours	CTL	grade	5	5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A	
	dark colours	CTL	grade	4-5	5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A	
Ignitability (cigarette test)	BS 5852 part 1 (1979) from The Furniture and Furnishing (Fire) (Safety) regulations: 1988 No. 1324. Schedule 4 part 1 Ignition source 0: cigarette	СТІ		passed					

Processing specifications								
Minimum workable width in centimeters	± 140							
Roll length in meters	± 30							
Material weight in grams per linear meter	± 700							
Test	Test specification	Executed by laboratory:	Unit	Testr	esult	Norm RAL GZ 430/4:2019-01		Norm DIN EN 14 465:2006-09
				Warp	Weft	DGM	DGM+	
Tensile strength	DIN EN ISO 13934-1:2013-08	CTL	Newton	890	462	min. 350	min. 400	A/B
Tear growth resistance	DIN EN ISO 13937-3:2000-06	CTL	Newton	159,4	95,9	min. 25	min. 30	A/A
Resistance to seam slippage	DIN EN ISO 13936-2:2004-07. Load 180 N	CTL	mm	2,4	1,6	max. 5	max. 4	A/A
Delamination	DIN 53530:1981-02	CTL	Newton	28,6	29,4	n/a	n/a	n/a
Chemical substances	REACH	Centexbel		pas	sed			
	Oeko-Tex, product class II	Centexbel		certified				

Cleaning specifications								
Test	Test specification	Executed by laboratory:	Unit	Testresult		Norm RAL GZ 430/4:2019-01		Norm DIN EN 14 465:2006-09
				Warp	Weft	DGM	DGM+	
Dimensional change for washing 30 degrees celcius / air drying	DIN EN ISO 5077:2008-04, DIN EN ISO 6330:2013-02, DIN EN ISO 3759:2011-08	CTL	%	-0,2	-0,2	n/a	n/a	A/A


























creativity in fabrics

Textaafoam b.v.La Défense 11 | 5026 SC Tilburg
P.O. Box 12 | 5050 AA Goirle
The Netherlands

T +31(0)13 534 5934 F +31(0)13 534 7586 E info@textaafoam.nl www.textaafoam.nl