




Racer



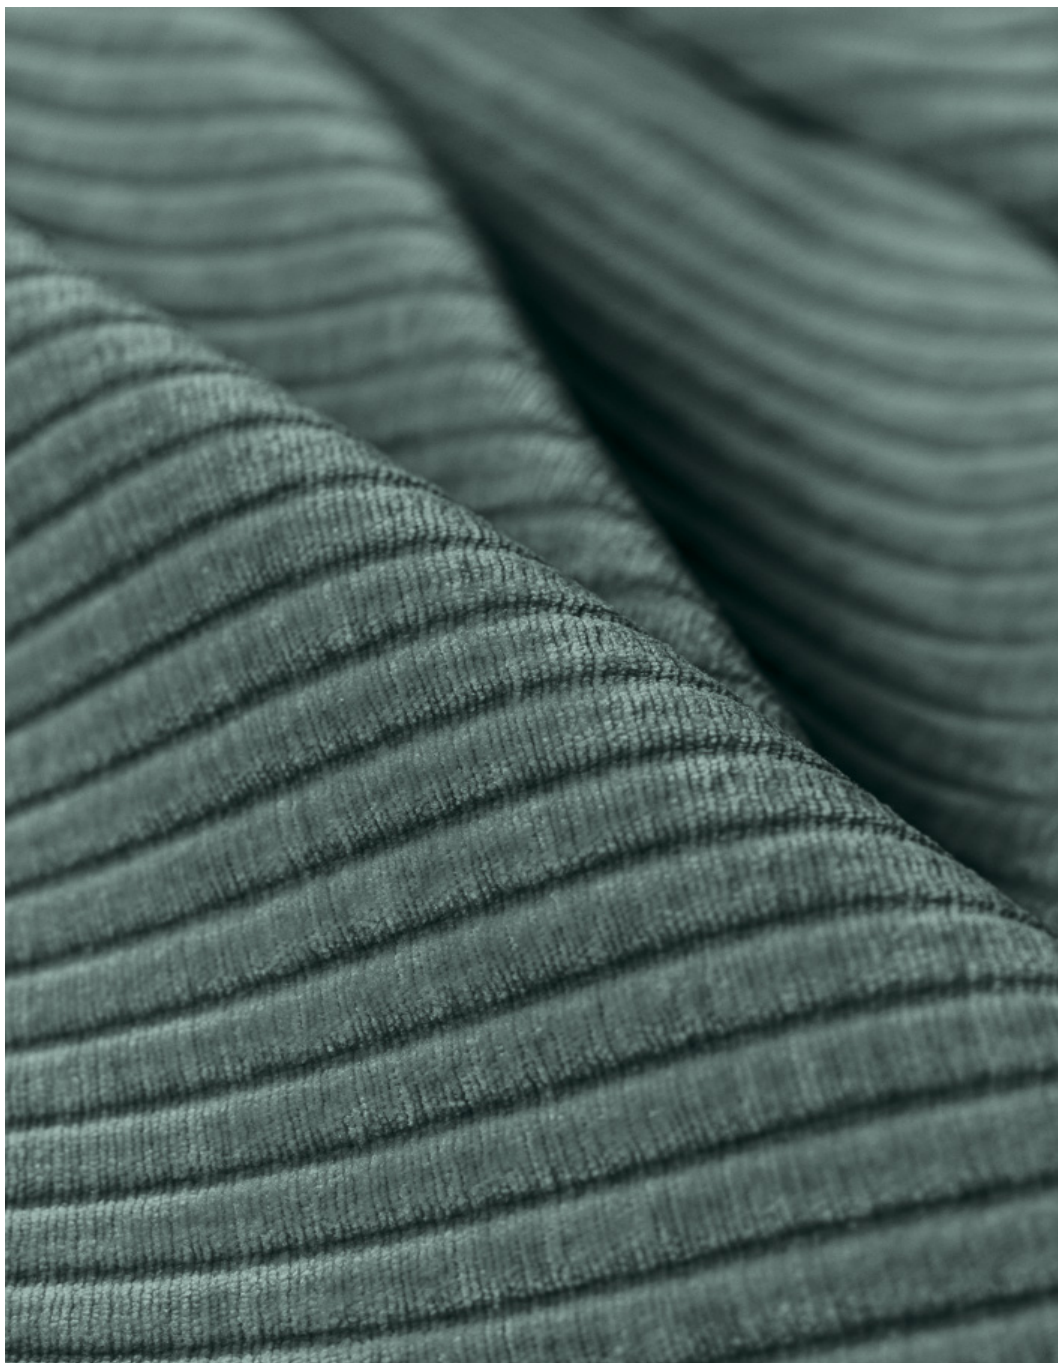

Racer

Hurry, to catch our fast-moving upholstery fabric Racer in our Comfort Collection. Softness, volume and elegance are the typical characteristics for this collection.

It's not another cord or a stripy velvet fabric, it is a high-low structured jacquard woven line design with a luxurious look and feel. It's made from the softest polyester chenille yarns, which create an ultimately soft touch and slightly cloudy effect.

The special weave construction gives Racer more stretch, therefore easy to upholster on rounded models, the stretch effect is in the warp, the weft and also the diagonal direction.

Racer is suitable for a variety of styles and applications. Due to the construction of this quality, we recommend a minimum seam allowance of 1 cm and kindly note that extra overlocking of the seam provides much more stability, especially with tight upholstered furniture.

The velvety look lends itself for deep warm colours, in which the team has developed this fabric, beside the commercial natural colours. Quality wise Racer fulfills all required upholstery tests and is even machine-washable at 30 degrees Celsius*.

The latex coating on the back gives extra stability.

The rib of this article is 9 mm and the base fabric in between 3,2 mm.

- Seat depression is to be expected, this is one of the characteristics of this chenille fabric.

- We recommend to wash the cover inside out and immediately place the cover back to the piece of furniture, slightly damp, after washing.

***Textafoam originals** Established in 1970, this Dutch family business brings together craftsmen in textiles and furniture design to build an unrivalled portfolio in upholstery fabrics that meets buyer's needs every time. Featuring a wide colour range, ultimate value for money and excellent reliability in the supply chain.*

Composition

/ faceside 100%PES
/ backside n/a
/ chenille jacquard

Suitable for


sofa's, beds, chairs with fitted and loose fitting upholstery



brass 170



brick 128



chocolate 17



clay 84



cream 02



curry 216



desert 109



graphite 66




hazel 96



hunter 156



jungle 207



lightgrey 60

Please note: colours may vary according to your screen settings.



linen 110



natural 01



ocre 23



pine 199



plumb 168



shitake 124



taupe 12



teal 198



winered 39

Please note: colours may vary according to your screen settings.

Racer - Article passport

Racer is a high-low structured fabric with a line pattern and is slightly stretchy.

Available from stock in a wide range of contemporary and commercial colours.

Product characteristics

Productgroup	chenille jacquard	
Applications	sofa's, beds, chairs with fitted and loose fitting upholstery	
Composition faceside	100%PES	
Composition backside	n/a	
Coating	transparent	
Statistic code	58013600	
Dyeing method	piece dyed	
Available colours	21	
Packaging	bubble wrap	

Durability specifications

Test	Test specification	Executed by laboratory:	Unit	Testresult		Norm RAL GZ 430/4:2019-01		Norm DIN EN 14 465:2006-09
				Dry	Wet	DGM	DGM+	
Abrasion resistance - yarn breakage	DIN EN ISO 12947-1:2007-04, DIN EN ISO 12947-2:2017-03	CTL	cycles	80.000		min. 20.000	min. 40.000	C
Pilling	DIN EN ISO 12945-2:2000-11. 2000 cycles	CTL	grade	4-5		min. 3-4	min. 4	A
Colour fastness to light	DIN EN ISO 105-BO2:2014-11. Process 3, exposure level 5							
	light colours	CTL	grade	5		min. 4	min.5	B
	middle colours	CTL	grade	5		min. 4	min.5	B
	dark colours	CTL	grade	5		min. 4	min.5	B
Colour fastness to rubbing	DIN EN ISO 105-X12:2016-11							
	light colours	CTL	grade	5	5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A
	middle colours	CTL	grade	4-5	5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A
	dark colours	CTL	grade	5	4-5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A
gnitability (cigarette test)	 BS 5852 part 1 (1979) from The Furniture and Furnishing (Fire) (Safety) regulations: 1988 No. 1324. Schedule 4 part 1 Ignition source 0: cigarette	CTL		passed				

Processing specifications

Minimum workable width in centimeters	± 138							
Roll length in meters	± 35							
Material weight in grams per linear meter	± 602							
Test	Test specification	Executed by laboratory:	Unit	Testresult		Norm RAL GZ 430/4:2019-01		Norm DIN EN 14 465:2006-09
				Warp	Weft	DGM	DGM+	
Tensile strength	DIN EN ISO 13934-1:2013-08	CTL	Newton	2.070	876	min. 350	min. 400	A/A
Tear growth resistance	DIN EN ISO 13937-3:2000-06	CTL	Newton	91,7	90,8	min. 25	min. 30	A/A
Resistance to seam slippage	DIN EN ISO 13936-2:2004-07. Load 180 N	CTL	mm	2,8	2,0	max. 5	max. 4	A/A
Delamination	DIN 53530:1981-02	CTL	Newton	n/a	n/a	n/a	n/a	n/a
Chemical substances	REACH	Centexbel		passed				
	Oeko-Tex, product class II	Centexbel		certified				

Cleaning specifications

Test	Test specification	Executed by laboratory:	Unit	Testresult		Norm RAL GZ 430/4:2019-01		Norm DIN EN 14 465:2006-09
				Warp	Weft	DGM	DGM+	
Dimensional change for washing 30 degrees celcius / air drying	DIN EN ISO 5077:2008-04, DIN EN ISO 6330:2013-02, DIN EN ISO 3759:2011-08	CTL	%	-2,0	-2,0	n/a	n/a	A/A
 - We recommend to wash the cover inside out and immediately place the cover back to the piece of furniture, slightly damp, after washing.								



Textaafoam b.v.

La Défense 11 | 5026 SC Tilburg
P.O. Box 12 | 5050 AA Goirle
The Netherlands

T +31(0)13 534 5934

F +31(0)13 534 7586

E info@textaafoam.nl

www.textaafoam.nl